



## Powerware 9315-80 65kVA

To Receive Detailed Quotation Call: 800-306-1125

<b>Condition</b>	<b>Pre-Owned</b>
<b>Model</b>	9315-80/65
<b>Config Number Serial Number</b>	P08004111205113 EV082ZBA01
<b>Phase</b>	Three Phase
<b>KVA</b>	65kVA
<b>Input Voltage</b>	208VAC
<b>Output Voltage</b>	208/120VAC
<b>Frequency (Hz)</b>	60 Hz
<b>Dimensions H x W x D</b>	<b>Inches</b> 73.5" x 34" x 31.5"
<b>Weight</b>	2,475 lbs
<b>Warranty</b>	90 Days
<b>Runtime Batteries</b>	Available - Not Included
<b>Price</b>	<b>13,000.00</b>



Empty Battery Cabinet Included  
Batteries available and vary upon request.  
Field Upgradable to 80kVA

Data Sheet: <http://unitedpb.com/documents/powerware/9315-80.pdf>

### Hardware Description:

- Digital front panel display that provides metering, alarm monitoring, and user control functions. Remote monitor panel.
- Automatic bypass provides an automatic transition to the bypass mode in the event of an overload or short circuit. This allows for load-starting currents to be provided by the utility, as in larger UPS systems, while the UPS does not need to be oversized.
- Emergency Power Off (EPO) is provided for immediate local shutdown, and a jack & plug for remote operation. Bypass Plus features automatic and manual maintenance bypass.
- Rectifier/charger: Incoming AC power shall be converted to DC by a full-wave rectifier. The DC power then shall be processed by a high frequency resonant converter to supply power to the inverter. The resonant converter shall contain a high-frequency transformer that shall provide galvanic isolation between the input and output. In the event of AC power failure, the resonant converter shall be supplied power, without interruption, by the battery.
- Overload Capability: The rectifier shall be capable of supplying an overload current of not less than 125% of rated full-load current.

**BUY**

**SELL**

**LEASE**

**RENT**

**TRADE**




**Model 50** 50kVA/40kW

**Model 65** 65kVA/52kW

**Model 80** 80kVA/64kW

# Powerware® 9315-80

## One line Diagram

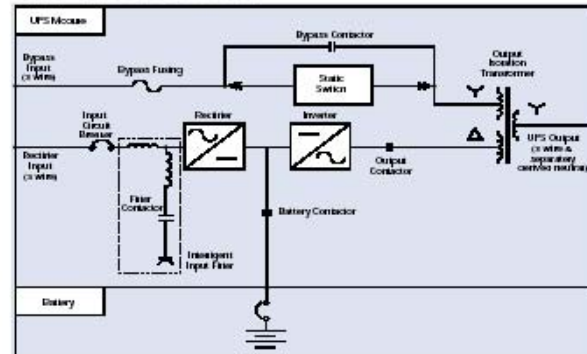

Note: Dual feed input not available for 208V or 220V input.

## Features

- ▶ DC Expert™ Battery Management System
- ▶ +/- 3% Battery Run Time
- ▶ Battery Health Indication
- ▶ Powerware Hot Sync® Redundant Capability
- ▶ Large display panel provides metering, statistics, alarm history and an active mimic bus
- ▶ Prioritized cooling of components
- ▶ System Monitoring:
  - ▶ PowerVision® network software
  - ▶ RS-232 port
  - ▶ SNMP conversion
  - ▶ Accessory port
  - ▶ Building alarm contacts
  - ▶ Intelligent input filter option

### Environmental Specifications

Ambient temperature: 0°C to +40°C  
 Storage: -20°C to +70°C  
 Relative humidity: 5-95% non-condensing  
 Altitude: 1500 meters (5000ft.) at 40°C ambient temperature without load derating  
 Audible noise: Less than 65 dBA at 1 meter; in accordance with ISO 7779  
 Electrostatic discharge: Withstands 25kV without damage or disturbance to the load; exceeds requirements of IEC 801-2  
 EMC: Meets FCC Class A and EN 50091-2 (CISPR 22, Class A)

### Input Specifications

Voltage range: (See chart on other side)  
 Frequency range: (60 Hz) 57-63 Hz; (50 Hz) 47-53 Hz  
 Surge protection: Meets ANSI C62.41, Category A & B, EN 50091-2 and EN 50082-2  
 Power factor: 0.95 typical at full load with input filter  
 Input current distortion less than 7% with input filter

Specifications subject to change without notice.

### Output Specifications

Voltage THD: Less than 5% (100% non-linear load with 3:1 crest factor); less than 3% (100% linear load)  
 Voltage regulation: Better than ±1%  
 Transient response: Less than 5% for 100% load step; full recovery within 1 cycle  
 Frequency: (free run) ±0.005 Hz  
 Frequency sync range: ±0.5 Hz  
 Frequency slew rate: 1 Hz/second maximum  
 Voltage adjustment range (operator): ±5%

### Battery Specifications

Matching cabinets – Line-up or remote  
 Battery type: Sealed, valve-regulated lead acid  
 Recharge time: 10-12 times the discharge time to 95%  
 Other battery options: Wet cell and nickel-cadmium batteries; open racks available  
 For battery run times and configurations, refer to Bulletin BAT01FXA.

### Safety

UL1778 Listed  
 CUL CAN/CSA C22.2 NO.107.1-M91 Listed  
 EN 50091-1  
 All cabinets provide seismic mounting features  
 Selectable DC ground fault detection capability

**Powerware 9315-80 Performance Characteristics**



		Model 50						Model 65						Model 80											
		50kVA/40kW						65kVA/52kW						80kVA/64kW											
Input Voltage	Volts	480	480	208	220	600	600	400 <sup>Ⓞ</sup>	480	480	208	220	600	600	400 <sup>Ⓞ</sup>	480	480	208	220	600	600	400 <sup>Ⓞ</sup>			
Output Voltage	Volts	208	480	208	208	600	208	400	208	480	208	208	600	208	400	208	480	208	208	600	208	400			
Input Voltage Range																									
Minimum	Volts	408	408	177	187	510	510	340	408	408	177	187	510	510	340	408	408	177	187	510	510	340			
Maximum	Volts	528	528	229	242	660	660	440	528	528	229	242	660	660	440	528	528	229	242	660	660	440			
Input / Output Frequency	Hz	60	60	60	60	60	60	50/60	60	60	60	60	60	60	50/60	60	60	60	60	60	60	50/60			
AC Input (With input filter)																									
Nominal Amps	Amps	56	56	128	120	45	45	69	72	72	167	156	58	58	90	89	89	205	192	72	72	106			
Maximum Amps <sup>Ⓞ</sup>	Amps	69	69	160	150	56	56	86	90	90	208	195	72	72	112	111	111	256	240	89	89	133			
AC Input (Without input filter)																									
Nominal Amps	Amps	66	66	150	142	52	52	81	85	85	196	186	68	68	105	105	105	241	228	84	84	126			
Maximum Amps <sup>Ⓞ</sup>	Amps	82	82	188	178	65	65	101	106	106	245	232	85	85	131	131	131	301	285	105	105	157			
Bypass Input																									
Nominal Amps	Amps	60	60	139	131	48	48	74	78	78	180	171	63	63	97	96	96	222	210	77	77	115			
AC Output																									
Nominal Amps	Amps	139	60	139	139	48	139	74	180	78	180	180	63	180	97	222	96	222	222	77	222	115			
10 Minutes Max.	Amps	174	75	174	174	60	174	93	225	98	225	225	79	225	121	278	120	278	278	96	278	144			
DC Link																									
Nominal DC Voltage	Volts	480	480	480	480	480	480	480	480	480	480	480	480	480	480	480	480	480	480	480	480	480			
Float Voltage	Volts	540	540	540	540	540	540	540	540	540	540	540	540	540	540	540	540	540	540	540	540	540			
End of Discharge <sup>Ⓞ</sup>	Volts	401	401	401	401	401	401	401	401	401	401	401	401	401	401	401	401	401	401	401	401	401			
Maximum Amps <sup>Ⓞ</sup>	Amps	100	100	100	100	100	100	100	130	130	130	130	130	130	130	160	160	160	160	160	160	160			
Physical Attributes (w/o batt.)																									
Installed Weight	Lbs	2000	2000	2475	2475	2475	3400	2475	2000	2000	2475	2475	2475	3400	2475	2000	2000	2475	2475	2475	3400	2475			
Installed Width	Inches	34	34	34	34	34	58	34	34	34	34	34	34	58	34	34	34	34	34	34	58	34			
System Efficiencies (Typical)																									
@ 100% Load	%	92	92	91	91	91	91	91	92	92	91	91	91	91	91	92	92	91	91	91	91	91	92		
@ 75% Load	%	92	92	91	90	90	90	90	92	92	91	91	91	91	91	92	92	91	91	91	91	91	92		
@ 50% Load	%	92	91	88	88	88	88	88	92	92	89	90	90	90	89	92	92	90	91	91	91	91	91		
Full Load Heat Dissipation																									
BTU/Hr. (x1000)		11.9	11.9	13.5	13.5	13.5	13.5	13.5	15.4	15.4	17.6	17.6	17.6	17.6	17.6	19.0	19.0	21.6	21.6	21.6	21.6	19.0			
KCal/Hr. (x1000)		3.00	3.00	3.40	3.40	3.40	3.40	3.40	3.89	3.89	4.43	4.43	4.43	4.43	4.43	4.79	4.79	5.45	5.45	5.45	5.45	4.79			
Inverter Efficiency (Full Load)	%	94	94	94	94	94	94	94	94	94	94	94	94	94	94	94	94	94	94	94	94	94			

Ⓞ Easily adjustable for 380 or 415 VAC Input/Output, 50 or 60 Hz. Ⓞ Maximum Amps equals full load current plus battery recharge current. Ⓞ End of Discharge based on 1.67 w/cell. Maximum Amps based on 1.8 w/cell.

**Physical Dimensions and Weights**

