



**VALVE REGULATED
LEAD ACID BATTERY (V.R.L.A.)**



**ADVANCED ABSORBED GLASS
MAT TECHNOLOGY (A.G.M.)**



**LONG DURATION BATTERIES
DESIGNED FOR MAXIMUM LIFE**



10 VOLT CONFIGURATION AVAILABLE !

Features

- Flame-retardant polypropylene case and cover compliant with UL94 V-0 with an Oxygen Limiting Index of greater than 28%.
- Gas recombination greater than 99%.
- Operates at a low internal pressure.
- Never needs watering, minimal maintenance.
- 99.7% pure lead, calcium alloy grids.
- Shock absorbent thick wall polypropylene cases.
- Cold forged non-porous terminal bushings, eliminate post leakage.
- Thermally welded case to cover bond, eliminates both acid and electrical leaks.
- Over-sized, through the partition inter-cell welds provide low resistance connections, with minimal power loss.
- Flame arresting, low pressure safety release venting system for individual cells, recognized per U.L. 924.
- Measured high vacuum acid fill, reduces electrical variability between cells.
- 100% recyclable materials.

Options


- Terminal covers.
- Inter-connecting battery cables.
- Custom wire harnesses.

Specifications

Cells per unit	3
Nominal voltage	6
Terminal type	Threaded copper insert, 5/16"
Short circuit current	6273 amps
Impedance @ 77°F 25°C	1.10 milliohms
Weight lbs / kgs	81.5 / 37.0
Electrolyte (S.G.)	1.300
Capacity @ 77°F (25°C)	193 AH (8 hrs) to 1.75 V.P.C.
Ideal operating temperature range	+68°F (+20°C) to +77°F (+25°C)
Extended operating temperature range	Discharge: -40°F (-40°C) to +140°F (+60°C) Charge: -4°F (-20°C) to +122°F (+50°C)
Float Voltage	6.75 to 6.90 @ 77°F (25°C)
Recommended maximum charging current	C/4 amperes at 100% discharge Unlimited at partial discharge.
AC ripple from charging source	1.5% peak to peak of float
Storage period without recharge	6 months at 77°F (25°C)

No transport restrictions

- Surface transport. Classified as non-hazardous material as relates to DOT-CFR Title 49 part 171-189.
- Maritime transport. Non hazardous as per IMDG amendment 27.
- Air transport. Non hazardous complies with IATA / ICAO, special provision A67.

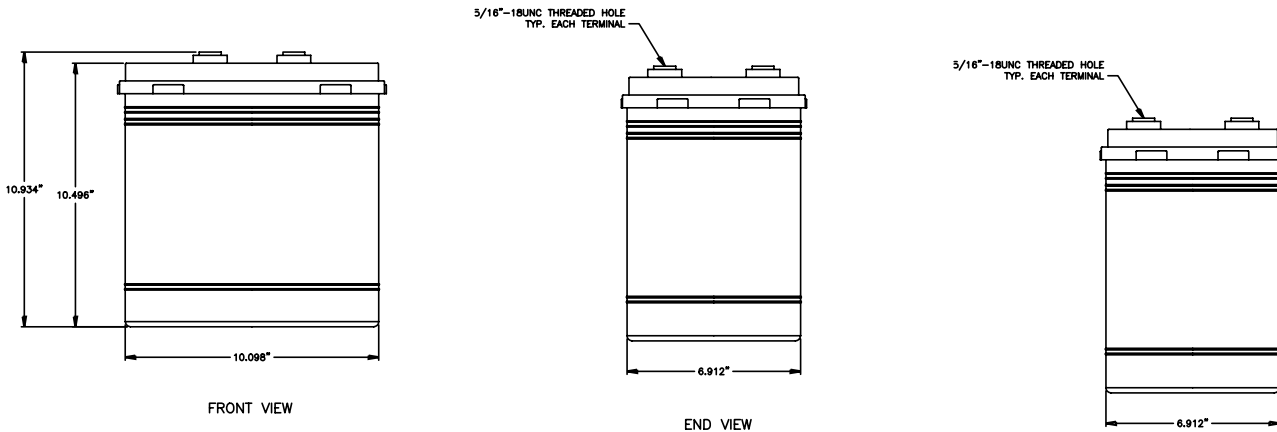

POWER BATTERY offers an extensive line of pre-wired and fused battery cabinets complete with UL and CUL approval. Standard and custom DC voltages complete with breakers and chargers are available.

Battery Cabinet Systems (pre-wired with TL-6195 batteries)

Battery cabinet model	Maximum # of batteries	Dimensions					
		inches			millimeters		
		H	W	D	H	W	D
KS6	4	17.75	16.0	34.5	451	406	876
KS7	8	37.25	16.0	34.5	946	406	876
CR1	12	43.0	24.0	32.5	1092	610	826
CR3	20	43.0	40.0	32.5	1092	1016	826
CR6	30	60.0	40.0	32.5	1524	1016	826
CR4	40	77.0	40.0	32.5	1956	1016	826
CR5	48	77.0	48.0	32.5	1956	1219	826

Hours discharge rates in constant current (Amperes) and constant power (Watts) @ 77°F (25°C)

Volts per cell		1	2	3	4	5	6	7	8	9	10	12	24	48
1.75	Amps	132	76.5	55.5	43.6	36.0	30.8	27.0	24.1	21.8	19.9	17.0	9.40	5.10
	* Watts	765	448	321	255	212	182	160	143	130	119	102	56.7	31.3
1.80	Amps	126	73.9	53.4	41.8	34.5	29.6	25.9	23.1	20.9	19.1	16.3	8.90	4.80
	* Watts	739	437	312	246	204	175	154	138	125	114	98.3	54.7	29.8
1.85	Amps	118	70.3	50.8	39.9	33.0	28.3	24.8	22.2	20.0	18.2	15.5	8.40	4.50
	* Watts	700	418	301	238	198	170	149	134	121	111	95.0	52.3	29.2
1.90	Amps	105	64.7	46.9	37.3	31.1	26.8	23.6	21.1	19.0	17.3	14.8	8.00	4.30
	* Watts	645	394	285	228	190	163	144	129	117	107	91.4	50.4	26.8

* For 10 Volt models reduce the Watts by 18%

U.S.A.
Power Battery Company, Inc.
 25 McLean Blvd.
 Paterson, N.J. 07514-1507
 Phone: (973) 523-8630
 Fax: (973) 523-3023
 E-mail: sales@powbat.com
 Web page: www.powerbattery.com

CANADA
Power Battery (Iberville) Ltd.
 770 Thomas Ave.
 Iberville, Québec, J2X 5E7
 Phone: (450) 346-3273
 Fax: (450) 346-8003
 E-mail: powerbat@sympatico.ca
 Web page: www.powerbattery.com

UK
Power Batteries Ltd.
 Premier Way, Abbey Park Industrial Estate
 Romsey, Hampshire, SO51 9AQ
 Phone: +44 (0)1794 835900
 Fax: +44 (0)1794 835910
 E-mail: sales@powbat.co.uk
 Web page: www.powbat.co.uk

ITALY
Power Battery Srl
 Via Locatelli 105
 20046 Biassono MI - ITALY
 Phone: +(39) 039 2324571
 Fax: +(39) 349 2499200
 E-mail: calberti@powbat.it
 Web page: www.powbat.it