

Long Duration Telecom


RPS Long Duration Telecom (LDT) batteries have been engineered specifically for telecommunication applications requiring reliable performance during long discharges. Flush-mount terminals on smaller batteries and front access terminals on the larger batteries provide the highest power density in size for their class and save time and money for ease of installation.

Applications


- Wireless
- Customer Premise
- Broadband
- Microwave
- Outside Plant
- FTTP/DLC

General Features

- Front Terminal Design
- AGM Sealed Maintenance Free
- Non-Spillable Construction
- Patented O-Ring and Epoxy Resin Post Seal
- UL 1778, 1989, 924 and DOT CFR 171-189 Approved
- UL94V-0 ABS Flame Retardant Case
- Thermally Welded Case to Cover Bond
- Exceptional Deep Discharge and Fast Recovery Capability
- Low Pressure One-Way Safety Release Valve with Flame Arrestors
- Exceptional Cycle Life Capability

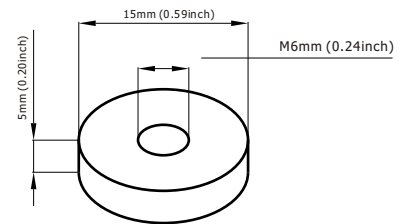

Terminal 6 mm Torque 6 NM / 53in/lbs

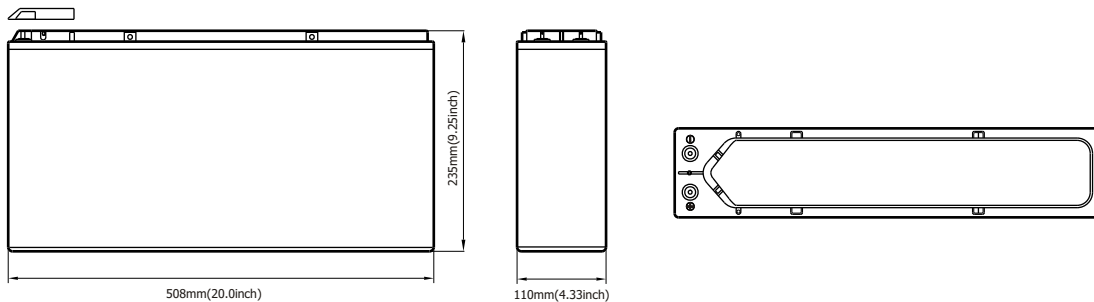

Battery Model		LDT12-105FT			
Designed Floating Life	12 Years				
Capacity(25°C)	20HR(5.25A,1.75V)	10HR(10.5A,1.75V)	8HR(12.6A,1.75V)	1HR(63A,1.75V)	
	112.4AH	105AH	102AH	63AH	
Dimensions	Length	Width	Height	Total Height	
	508mm(20inch)	110mm(4.33inch)	236mm(9.29inch)	236mm(9.29inch)	
Approx. Weight	32.5Kg (72.2lbs)				
Internal Resistance	Full charged at 25°C: 0.005 Ohm				
Self Discharge	3% of capacity declined per month at (25°C)				
Capacity Affected by Temp.(20HR)	40°C	25°C	0°C	-15°C	
	102%	100%	85%	65%	
Charge Voltage(25°C)	Cycle use		Float use		
	14.4-15V(-30mV/ °C), max. Current: 25A		13.6-13.8V(-20mV/ °C)		

F.V/Time	1 HR	2 HR	3 HR	4 HR	5 HR	8 HR	10 HR	20 HR
1.75V	66.7	41.0	27.0	22.3	17.4	12.6	10.6	5.5
1.80V	65.1	40.2	26.3	21.7	17.1	12.4	10.5	5.4
1.85V	61.8	38.4	25.1	20.7	16.4	11.9	10.2	5.0
1.90V	59.8	37.4	24.4	20.1	16.0	11.6	10.0	4.8



ISO9001:2000 Certificate



G4M20206-0910-E-16



MH28539



RBRC

