

# XTREME POWER CONVERSION P80

Pure Sine Wave Line Interactive UPS // 120VAC

For more information, visit [www.xpcc.com/p80](http://www.xpcc.com/p80)



## Advanced line interactive power protection for servers and network equipment

The P80 is a pure sine wave line interactive UPS that protects critical data and equipment from power problems while supplying clean and reliable network grade power.

P80 units are the highest efficiency available, providing utility cost savings at all load levels. P80 design provides flexible mounting including tower, rack, or optional wall mounting.

P80 unity and 0.90 Power Factor models provide more power for high density loads.

For true online double conversion models, reference the P90 at [www.xpcc.com/p90](http://www.xpcc.com/p90)

### PRODUCT SNAPSHOT

- › Available models: P80-800, 1100, 1500, 2200, 3000
- › Pure sine wave output
- › Tower, wall, 2-post and 4-post rack mounting configurations available
- › UL, cUL, RoHS
- › 3 years electronics, 3 years battery warranty (USA and Canada)

### FEATURES

**Auto restart**—after full battery discharge, the P80 automatically restarts when utility power returns

**99% efficient operation**—high efficiency ECO mode lowers energy consumption

**Smart LCD display**—vital monitoring and precise information from the front panel

**Programmable receptacle group**—maximize uptime for critical loads and equipment by shedding less critical loads

**Temperature compensation**—temperature compensated charging to prolong battery life and help reduce replacement costs

**Hot swappable battery**—easy to replace without interrupting the load

**Extended battery runtimes**—optional matching battery modules available with P80-1500, 2200, and 3000 models for extended runtimes

**Maintenance bypass**—an optional XBDM bypass module enables the P80 to be replaced or serviced without interruption of power to critical loads (excluding P80-3000 model)

**\$50,000 load protection policy**—protection against damaged connected equipment

# MODEL SELECTION GUIDE


For more information, visit [www.xpcc.com/p80](http://www.xpcc.com/p80)

MODEL NUMBER		P80-800	P80-1100	P80-1500	P80-2200	P80-3000
CAPACITY	Power rating	800VA (720W)	1100VA (990W)	1500VA (1350W)	2200VA (1980W)	3000VA (2700W)
INPUT	Voltage nominal	120VAC				
	Voltage range	-32% to +27% without use of battery				
	Frequency	50/60Hz auto sensing				
OUTPUT	Voltage	120VAC nominal (110/115/127 selectable)				
	Waveform	Pure sine wave				
	Transfer time (typical)	2–6ms				
	Efficiency	Up to 99% ECO mode, 95% buck and boost mode				
	Harmonic distortion	2% @ 100% linear load; 5% @ 100% non-linear load				
BATTERY	Battery type	Sealed, maintenance-free lead acid				
	Battery quantity and size	(2) 12V 7AH	(2) 12V 9AH	(4) 12V 7AH	(6) 12V 7AH	(6) 12V 9AH
	Charging current	1.5A max				
	Typical recharge	4 hours to 90%				
PHYSICAL	Dimensions (W x D x H)	17.2 x 16.1 x 3.5 in		17.2 x 20.1 x 3.5 in	17.2 x 24.8 x 3.5 in	
	Weight	29.3 lbs	28.7 lbs	44.7 lbs	63.7 lbs	61.9 lbs
	Line cord	6 ft, 5–15P	6 ft, 5–15P	6 ft, 5–15P	6 ft, 5–20P	6 ft, L5–30P
	Receptacles	(8) NEMA 5–15R			(8) NEMA 5–15/20R	
OPTIONAL BATTERY PACKS	Model number	N/A		BP48	BP72	
	Dimensions (W x D x H)	N/A		17.2 x 18.9 x 3.5 in	17.2 x 23.6 x 3.5 in	
	Weight	N/A		74.6 lbs	104.4 lbs	
	Battery	N/A		(8) 12V 9AH / 48V	(12) 12V 9AH / 72V	
ENVIRONMENT	Operating temperature	32–104°F (0–40°C)				
	Audible noise	< 45dBA				
	Altitude	11,500 ft above sea level				
APPROVALS	UL, cUL, RoHS					
WARRANTY	3 years electronics, 3 years battery warranty (USA and Canada)					
COMMUNICATIONS INTERFACE	RS-232, USB, EPO, intelligent slot for optional cards (Web/SNMP, Relay/dry contact, Modbus)					
INCLUDED IN BOX	Software CD, horizontal brackets, tower pedestals, user manual					
AVAILABLE OPTIONS	5 year extended warranty, bypass distribution (XBDM), power distribution (XPDU), 4-post rail kit, 2-post shelf kit, wall mount bracket					

## BATTERY RUNTIMES

Percentage load:	Internal batteries				(1) Battery pack				(2) Battery packs			
	25%	50%	75%	100%	25%	50%	75%	100%	25%	50%	75%	100%
P80-800	35	14	7	4	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
P80-1100	28	11	5	3	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
P80-1500	39	16	8	5	133	55	33	22	256	106	63	44
P80-2200	39	16	8	5	135	56	33	23	260	108	64	44
P80-3000	32	13	7	4	125	54	32	22	236	102	60	42

Maximum of two battery packs per P80-1500, P80-2200, or P80-3000. Runtimes are shown in minutes and will vary based on battery condition, age, cycles, and ambient temperature.

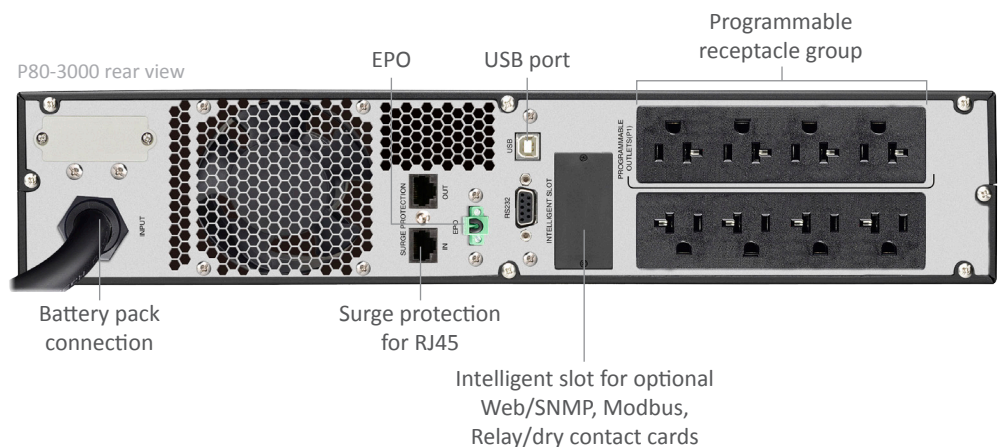

**X-TREME**  
Power Conversion®

Protect your business.

XPC USA / Denver, CO / sales@xpcc.com

XPC EMEA / Rotterdam, NL / emea@xpcc.com

www.xpcc.com

©2016 Xtreme Power Conversion Corporation. All Rights Reserved. P80.01U (Rev 10/13/16)