



Sprinter S12V170 data sheet



Drawing:

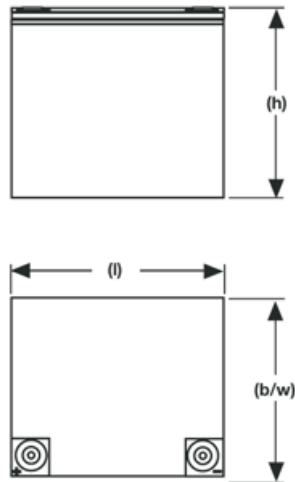

Terminal:



Specifications:

Exide type designation	Part number	Nom. Voltage V	Power 15min	Power 15min	Length l max. mm	Width b/w max. mm	Height h1 max. mm	Height over terminals h2 max. mm	Weight approx. kg	Internal resistance acc. IEC896-2 mOhm	Short circuit current acc. IEC896-2 A	Terminal F-M6
			1.67 VpC 20°C W/cell	1.67 VpC 25°C W/cell							2341	
S12V170	NASR120170HP0FA	12	158	167	198.0	167.0	178.0	189.0	16.40	5.3	2341	F-M6

Part numbers not valid for North America, use type for ordering!

Constant-power discharge in W/cell (@ 25 °C):

Part number	Exide type designation	VpC	5min	10min	15min	20min	30min	45min	1h	1.5h
NASR120170HP0FA	S12V170	1.85	248.0	179.0	143.0	119.0	90.0	67.0	53.0	38.0
NASR120170HP0FA	S12V170	1.80	280.0	197.0	155.0	129.0	97.0	71.0	56.0	40.0
NASR120170HP0FA	S12V170	1.75	302.0	208.0	162.0	134.0	100.0	73.0	58.0	41.0
NASR120170HP0FA	S12V170	1.70	318.0	214.0	165.0	136.0	101.0	73.0	58.0	41.0
NASR120170HP0FA	S12V170	1.67	323.0	215.0	167.0	137.0	102.0	74.0	58.0	41.0
NASR120170HP0FA	S12V170	1.65	326.0	216.0	167.0	137.0	102.0	74.0	58.0	41.0
NASR120170HP0FA	S12V170	1.60	332.0	218.0	168.0	138.0	102.0	74.0	58.0	41.0
NASR120170HP0FA	S12V170	1.50	335.0	220.0	170.0	139.0	103.0	75.0	59.0	42.0