



Sprinter S12V370 data sheet



Drawing:

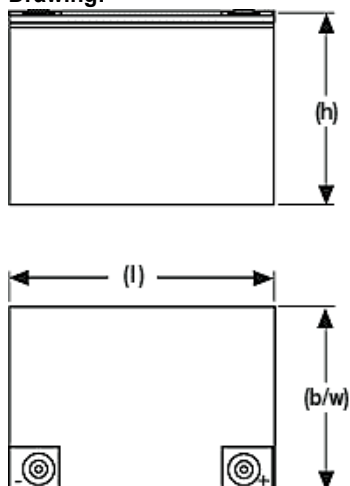

Terminal:



Specifications:

Exide type designation	Part number	Nom. Voltage V	Power 15min	Power 15min	Length l max. mm	Width b/w max. mm	Height h1 max. mm	Height over terminals		Weight approx. kg	Internal resistance acc. IEC896-2 mOhm	Short circuit current acc. IEC896-2 A	Terminal
			VpC 20°C W/cell	VpC 25°C W/cell				h2 max. mm	h2 max. mm				
S12V370	NASR120370HP0FA	12	353	373	306.0	174.0	224.0	235.0	33.40	2.9	4266	F-M6	

Part numbers not valid for North America, use type for ordering!

Constant-power discharge in W/cell (@ 25 °C):

Part number	Exide type designation	VpC	5min	10min	15min	20min	30min	45min	1h	1.5h
NASR120370HP0FA	S12V 370	1.85	514.0	374.0	302.0	255.0	196.0	147.0	118.0	84.0
NASR120370HP0FA	S12V 370	1.80	607.0	435.0	345.0	287.0	218.0	159.0	127.0	89.0
NASR120370HP0FA	S12V 370	1.75	668.0	458.0	359.0	297.0	224.0	163.0	129.0	91.0
NASR120370HP0FA	S12V 370	1.70	703.0	481.0	372.0	307.0	228.0	165.0	130.0	91.0
NASR120370HP0FA	S12V 370	1.67	723.0	484.0	373.0	309.0	230.0	167.0	131.0	92.0
NASR120370HP0FA	S12V 370	1.65	732.0	486.0	375.0	309.0	230.0	167.0	131.0	92.0
NASR120370HP0FA	S12V 370	1.60	739.0	488.0	376.0	310.0	231.0	168.0	132.0	93.0
NASR120370HP0FA	S12V 370	1.50	753.0	490.0	378.0	311.0	232.0	168.0	132.0	93.0