



## VISION Rechargeable Products Sealed Lead Acid Battery

[www.vision-batt.com](http://www.vision-batt.com)

# UNA Series

## High Rate Discharge

The new VISION UNA series batteries are designed for UPS Standby Power Applications requiring high power output. Computer designed grids and optimized plate paste formula produce high energy density and long lasting uninterrupted power for critical systems.

Shenzhen Center Power Tech Co., Ltd has more than 20 year's experience in the manufacturing of VRLA batteries.

SZCPT is one of the largest manufacturers of SLA (or VRLA) batteries in the world, the largest one in Mainland China and the first in China to develop and commercialize the sealed lead-acid battery with brand name VISION and has been at the forefront of battery technology from day one.

SZCPT leads the world in innovative battery technology. Our global network of sales and service engineers, backed in turn by our agents and distributors, means that we are currently active in more than 100 countries.

**Shenzhen Center Power Tech. Co., Ltd**

# UNA12-420 12V 420W

(Edition 2014-9)

## General Features

- Computer designed low calcium tin alloy plates extend battery life with minimum grid growth and reduced gassing.
- Absorbent Gas Mat (AGM) technology for efficient gas recombination of up to 99% and maintenance free operation.
- Flame retardant (UL 94-V0) case and covers.
- Can be operated in any orientation.
- Not restricted for air transportation, complies with IATA/ICAO Special Provision A67
- Not restricted for ground transportation, classified as non-hazardous material as related to DOT-CFR Title 49 parts 171-189.
- UL recognized component.
- Very high power output with 10 years design life @25C.
- Low self-discharge rate.



## Dimensions and Weight

	Metric Units	English Units
Length	339mm	13.3inch
Width	173mm	6.81inch
Height	215mm	8.46inch
Total Height	220mm	8.66inch
Approx. Weight	31.5Kg	69.4lbs

## Performance Characteristics

- Nominal Voltage 12V
- Number of cell 6
- Nominal Capacity 77°F(25°C)
  - 15 min wattage @1.67V 420W/cell
  - 10 hour rate (10.0A, 10.8V) 100Ah
  - 20 hour rate (5.30A, 10.5V) 106Ah
- Torque setting: 8.5NM
- Internal Resistance
  - Fully Charged battery 77°F(25°C) ≤ 3.5 mOhms
- Self-Discharge
  - 3% of capacity declined per month at 20°C(average)
- Operating Temperature Range
  - Discharge -20~60°C
  - Charge -10~60°C
  - Storage -20~60°C
- Max. Discharge Current 77°F(25°C) 900A(5s)
- Charge Methods: Constant Voltage Charge 77°F(25°C)
  - Cycle use 14.4V-14.7V
  - Maximum charging current 30A
  - Temperature compensation -30mV/°C
- Standby use 13.4V-3.8V
  - Temperature compensation -20mV/°C



Center Power Industrial Park, Tongfu Industrial District Dapeng Town, 518120 Shenzhen, China  
Tel: 86 755 84318088 Fax: 86 755 84318038 E-mail: [sales@vision-batt.com](mailto:sales@vision-batt.com)  
Website: <http://www.vision-batt.com>

**UNA12-420 12V 420W**


**Discharge Data**

Constant Current Discharge Data (Ampere at 25 °C)								
End Voltage Volts/Cell	3min	5min	10min	15min	20min	30min	45min	60min
1.60	600	460	317	240	190	160	97.0	72.9
1.67	573	434	295	225	178	152	95.7	70.0
1.70	551	411	280	210	167	140	92.0	68.0
1.75	525	390	267	200	162	135	89.0	66.0
1.80	494	365	250	191	156	127	85.1	62.0

Constant Power Discharge Data (Watts at 25 °C)								
End Voltage Volts/Cell	3min	5min	10min	15min	20min	30min	45min	60min
1.60	980	800	568	437	348	292	182	137
1.67	935	751	538	420	335	285	178	134
1.70	892	711	508	395	323	272	172	130
1.75	850	667	477	372	303	260	168	126
1.80	787	627	454	349	290	251	161	119

(Note)The above characteristics data are average values obtained within three charge/discharge cycles not the minimum values.  
All data shall be changed without notice,Vision reserves the right to explain and update the information contained hereinto.

**Performance drawings**

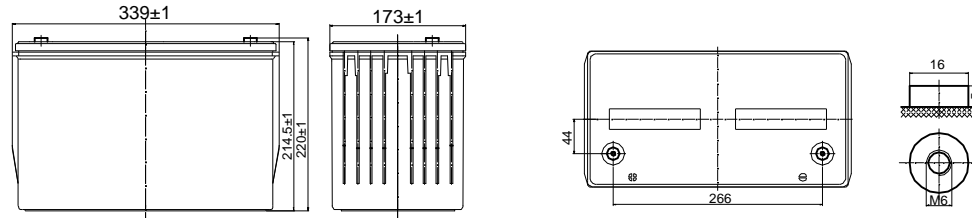

**UNA12-420 12V 420W**

