

XTREME POWER CONVERSION XPDU

Rack Power Distribution // 15A to 50A

For more information, visit www.xpcc.com/xpdu



Rack power distribution solutions designed to meet the needs of any data center or wiring closet

Improve data center power distribution with the XPDU family, a series of power distribution units that combine the key features needed to manage high density equipment racks or wiring closets.

XPDU's deliver reliable power distribution to multiple units of connected equipment by adding up to 24 receptacles to your rack space. These PDUs compliment your current power source and are compatible with any manufacturer's UPS.

PRODUCT SNAPSHOT

- › Available 120V models: 15A, 20A
- › Available 208V & 240/120V models: 30A, 50A
- › Vertical and horizontal configurations
- › UL, cUL, FCC, CE (varies by model)
- › 3 year full warranty (USA and Canada)

FEATURES

Plug and power—XPDU's provide up to 24 receptacles for power distribution

Receptacle control—switched model includes Web/SNMP interface with monitoring software and on/off control of up to 8 receptacles

Hardwired models—input pigtail available with Basic XPD3 models

NEMA plugs and IEC inlet—multiple input configurations available

Branch circuit protection—UL1077 listed output circuit breaker

Mounting options—wall, rack, and floor mounting options available


Agency listed—UL, cUL, FCC, CE listings available (varies by model)

Transformer PDU—provides 208V to 120V step down

MODEL SELECTION GUIDE

For more information, visit www.xpcc.com/xpdu

| MODEL NUMBER | Input Power Connection | Outlets | Voltage | Circuit Breaker | Dimensions (W x D x H) | Weight |
|---|--------------------------|--|---------------------------|-----------------|---------------------------|----------|
| Switched PDU | | | | | | |
| XPD0815SL | Detachable 10 ft, 5-15P | (8) 5-15/20R | 120V | 15A | 17 x 3.75 x 1.7 in (1U) | 4.4 lbs |
| SPD-0215 | IEC C14 inlet | (2) 5-15R | 120V | N/A | 5.4 x 6.0 x 2.5 in | 2.0 lbs |
| Transformer PDU | | | | | | |
| XPD-IT60A | 3 ft, L6-30P | (12) 5-15/20R | 208V input 120V output | 30A | 19.0 x 18.0 x 3.5 in (2U) | 137 lbs |
| XPD-AT15A | Detachable 3 ft, IEC C14 | (8) 5-15R front + (8) 5-15R rear | 208V input 120V output | 15A | 19.0 x 10.5 x 3.5 in (2U) | 19.7 lbs |
| Basic PDU - 15A & 20A models | | | | | | |
| XPD815HV | 12 ft, 5-15P | (8) 5-15R | 120V | 15A | 17 x 3.75 x 1.7 in (1U) | 2.6 lbs |
| XPD1415HV | 12 ft, 5-15P | (14) 5-15R | 120V | 15A | 17 x 3.75 x 1.7 in (1U) | 3.5 lbs |
| XPD1420HV | 12 ft, 5-20P + L5-20P | (14) 5-20R | 120V | 20A | 17 x 3.75 x 1.7 in (1U) | 4.8 lbs |
| XPDU-IEC | IEC C20 inlet | (2) IEC C19 + (10) IEC C13 | 230V | 15/20A | 17 x 3.75 x 1.7 in (1U) | 4.4 lbs |
| Basic PDU - 30A & 50A models | | | | | | |
| XPD24C13V | 6 ft, L6-30P | (24) C13 | 208V | 30A | 66.0 x 1.8 x 1.8 in | 12.0 lbs |
| XPD31 | 6 ft, L6-30P | (2) L6-30R + (2) L6-20R + (4) 6-15/20R | 240V | 30A | 19.0 x 4.7 x 3.5 in (2U) | 9.0 lbs |
| XPD32 | 6 ft, L6-30P | (2) L6-30R + (4) L6-20R | 240V | 30A | 19.0 x 2.4 x 3.5 in (2U) | 7.5 lbs |
| XPD33 | 6 ft, L6-30P | (4) IEC C19 + (8) IEC C14 | 240V | 30A | 19.0 x 2.4 x 3.5 in (2U) | 6.0 lbs |
| XPD34 | 6 ft, L14-30P | (2) L6-30R + (4) L6-20R + (12) 5-20R | 240/120V | 30A | 19.0 x 4.7 x 3.5 in (2U) | 9.5 lbs |
| XPD35 | Pigtail | (2) L6-30R + (4) L6-20R | 240V | 50A | 19.0 x 2.4 x 3.5 in (2U) | 7.0 lbs |
| XPD36 | Pigtail | (4) IEC C19 + (8) IEC C14 | 240V | 50A | 19.0 x 2.4 x 3.5 in (2U) | 6.8 lbs |
| XPD37 | Pigtail | (2) L6-30R + (4) L6-20R + (12) 5-20R | 240/120V | 50A | 19.0 x 4.7 x 3.5 in (2U) | 10.0 lbs |
| Value PDU | | | | | | |
| XPS1215HVP | 6 ft, 5-15P | (12) 5-15R | 120V | 15A | 17 x 1.5 x 1.7 in (1U) | 1.4 lbs |

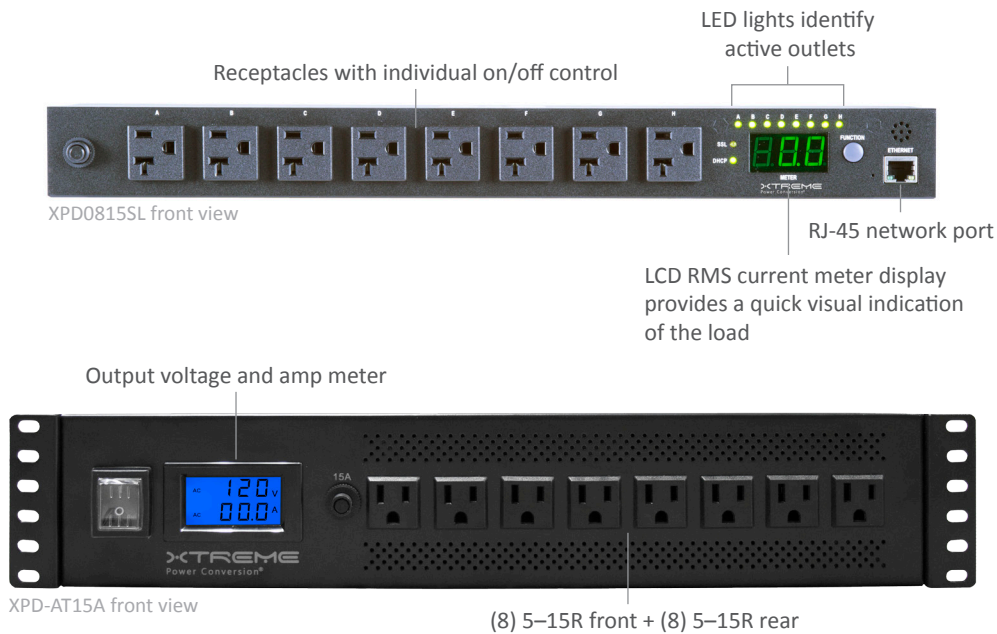

Protect your business.

XPC USA / Denver, CO / sales@xpcc.com

XPC EMEA / Rotterdam, NL / emea@xpcc.com

www.xpcc.com

©2016 Xtreme Power Conversion Corporation. All Rights Reserved. XPDU.01U (Rev 8/22/16)