


Rechargeable Sealed Lead-Acid Battery

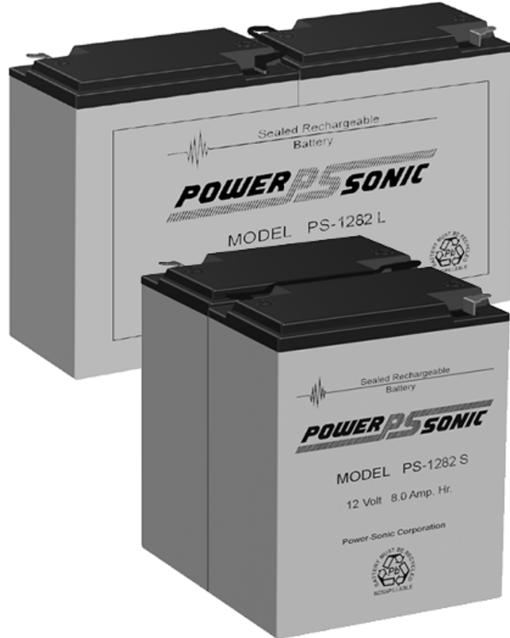

PS-1282L, 1282S

Power-Sonic rechargeable batteries are lead-lead dioxide systems. The dilute sulphuric acid electrolyte is suspended and thus immobilized. Should the battery be accidentally overcharged producing hydrogen and oxygen, special one-way valves allow the gases to escape thus avoiding excessive pressure build-up. Otherwise, the battery is completely sealed and is, therefore, maintenance-free and leak proof.

PS-1282L and PS-1282S are air transport approved, and meet all current requirements set forth by the C.A.B., F.A.A., I.A.T.A. and D.O.T.


U.L. recognizes models PS-1282L and PS-1282S under file number MH 14328.




PERFORMANCE SPECIFICATIONS

Nominal Voltage	12 volts (6 cells in series)
Nominal Capacity	
20 hour rate (400mA to 10.50 volts)	8.0 A.H.
10 hour rate (750mA to 10.50 volts)	7.5 A.H.
5 hour rate (1300mA to 10.20 volts)	6.5 A.H.
1 hour rate (4600mA to 9.00 volts)	4.6 A.H.
Approximate Weight	6.70 pounds (3.0 kg)
Energy Density (20 hour rate)	1.22 Watt-hours/cubic inch (74.1 Watt-hours/l)
Specific Energy (20 hour rate)	14.3 Watt-hours/pound (32.0 Watt-hours/kg)
Internal Resistance (Fully Charged Battery)	20 milliohms (approximately)
Maximum Discharge Current (≤ 7 Min.)	24 amperes
Maximum Short-Duration Discharge Current (≤ 10 Sec.)	80 amperes
Terminals	Quick disconnect tabs, 0.187" x 0.032" Mate with AMP. INC. FASTON "187" series.
Vibration Test (2000 cycles/minute, 0.10 inch excursion, 2 hours)	No loss in capacity or performance
Shelf Life — % of nominal capacity at 68° F (20° C)	
1 Month.....	97%
3 Months.....	91%
6 Months.....	83%
Operating Temperature Range	
Charge	-4°F (-20°C) to 122°F (50°C)
Discharge	-4°F (-20°C) to 140°F (60°C)
Case	High-impact Polystyrene


Shelf Life and Storage

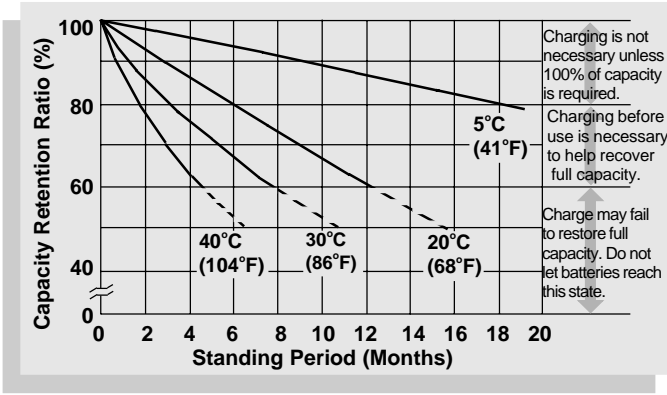


Discharge Characteristics

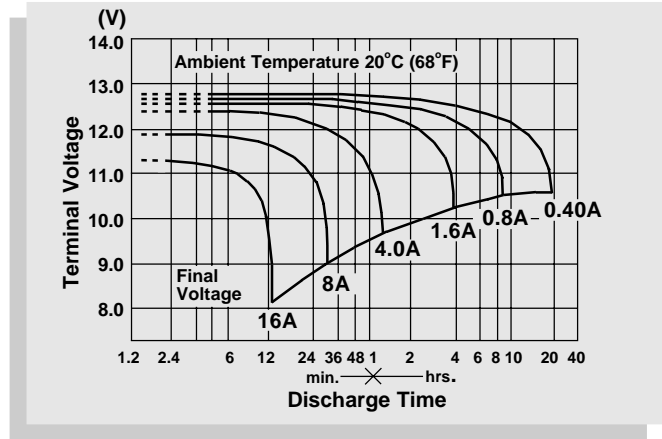


Life Characteristics in Stand-By Use

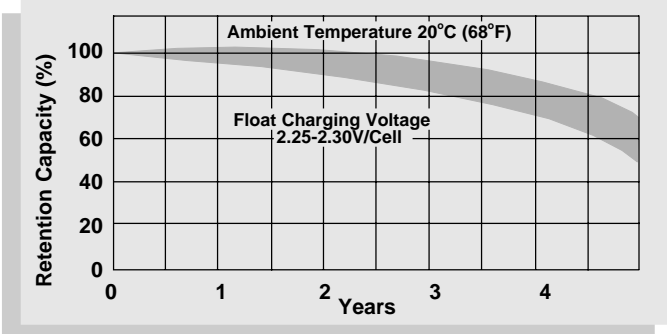

Discharge Time vs. Discharge Current

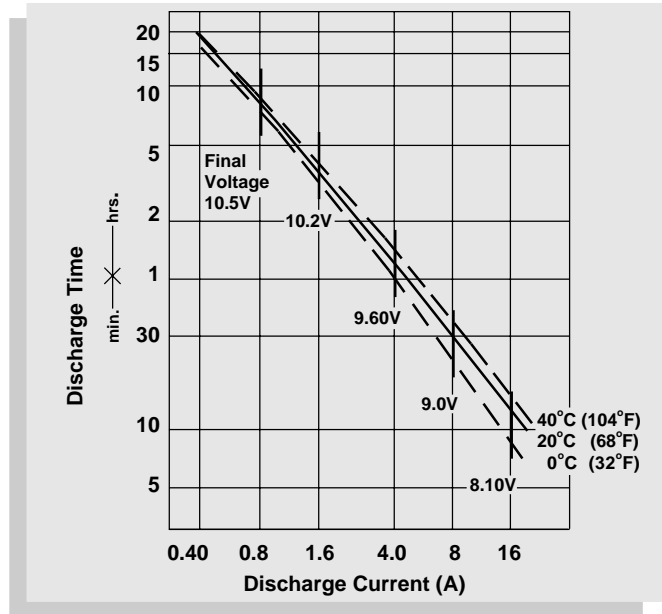


Life Characteristics in Cyclic Use

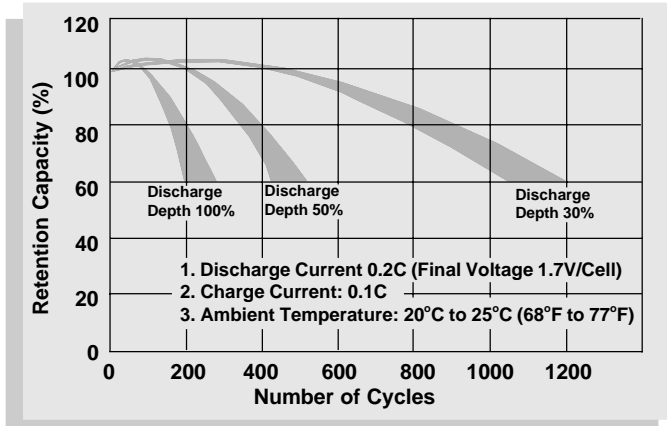


Physical Dimensions: in. (mm)

PS-1282 S



PS-1282 L

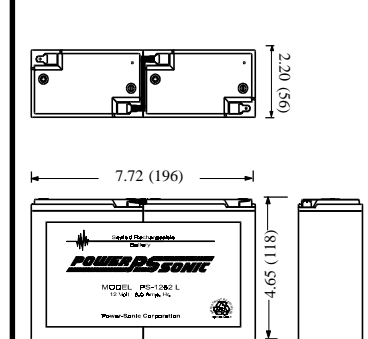

Tolerances are +/- 0.04 in. (+/- 1mm) and +/- 0.08 in. (+/- 2mm) for height dimensions.

CHARGING

Cycle Applications: Limit initial current to 1600mA. Charge until battery voltage (under charge) reaches 14.40 to 14.70 volts at 68°F (20°C). Hold at 14.40 to 14.70 volts until current drops to approximately 80mA. Battery is fully charged under these conditions, and charger should either be disconnected or switched to "float" voltage.

"Float" or "Stand-By" Service: Hold battery across constant voltage source of 13.50 to 13.80 volts continuously. When held at this voltage, the battery will seek its own current level and maintain itself in a fully charged condition.

NOTE: Due to the self-discharge characteristics of this type of battery, it is imperative that they be charged after 6-9 months of storage, otherwise permanent loss of capacity might occur as a result of sulfation.



SALES & MARKETING
3106 Spring Street
Redwood City, CA 94063 USA
Tel: 650-364-5001 Fax: 650-366-3662
rwcsales@power-sonic.com

www.power-sonic.com

CUSTOMER SERVICE
9163 Siempre Viva Road
San Diego, CA 92173 USA
Tel: 619-661-2030 Fax: 619-661-8033
battery@power-sonic.com