


Rechargeable Sealed Lead-Acid Battery

PS-6200

6 Volt 20.0 Amp. Hrs.

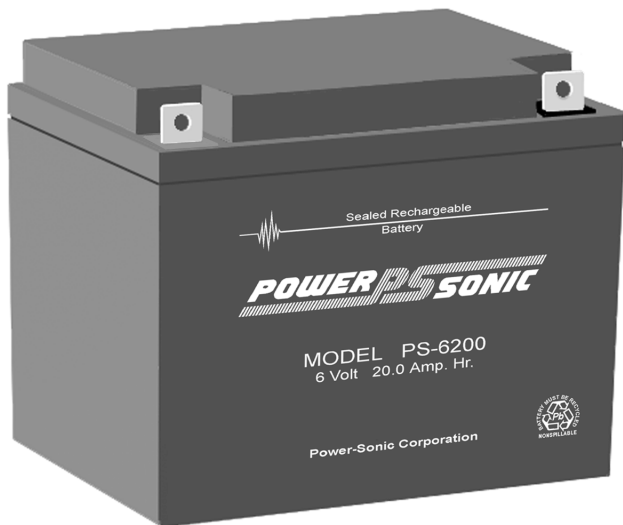

Features:


- Absorbent Glass Mat (AGM) technology for superior performance.
- Valve regulated, spill-proof construction.
- Power/volume ratio yielding unrivaled energy density.
- Rugged ABS plastic construction.
- Approved for transport by air. D.O.T., I.A.T.A., F.A.A. and C.A.B. certified.
- U.L. recognized under file number MH 14328.




PERFORMANCE SPECIFICATIONS

Nominal Voltage	6 volts (3 cells in series)
Nominal Capacity	
20 hour rate (1000mA to 5.25 volts)	20.0 A.H.
10 hour rate (1800mA to 5.25 volts)	18.0 A.H.
5 hour rate (3300mA to 5.10 volts)	16.5 A.H.
1 hour rate (12300mA to 4.50 volts)	12.3 A.H.
Approximate Weight	8.20 pounds (3.7 kg)
Energy Density (20 hour rate)	1.21 Watt-hours/cubic inch (73.7 Watt-hours/l)
Specific Energy (20 hour rate)	14.7 Watt-hours/pound (32.4 Watt-hours/kg)
Internal Resistance (Fully Charged Battery)	12 milliohms (approximately)
Maximum Discharge Current (≤ 7 Min.)	200 amperes
Maximum Short-Duration Discharge Current (≤ 10 Sec.)	400 amperes
Terminal configurations	Nut and bolt connector
Vibration Test (2000 cycles/minute, 0.10 inch excursion, 2 hours)	No loss in capacity or performance
Shelf Life — % of nominal capacity at 68° F (20° C)	
1 Month.....	97%
3 Months.....	91%
6 Months.....	83%
Operating Temperature Range	
Charge	-4°F (-20°C) to 122°F (50°C)
Discharge	-4°F (-20°C) to 140°F (60°C)
Case	ABS (Acrylonitrile Butadiene Styrene Copolymer)


Shelf Life and Storage

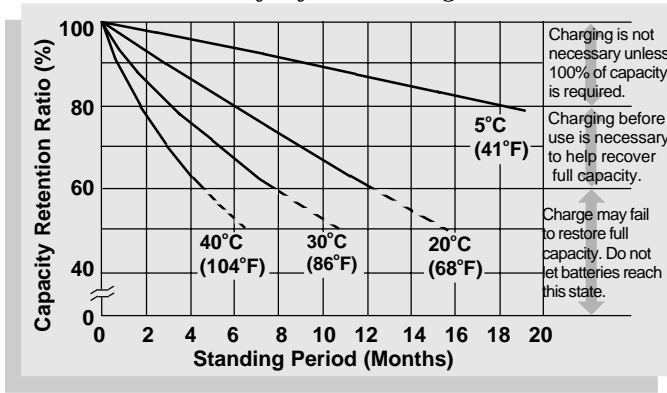


Discharge Characteristics

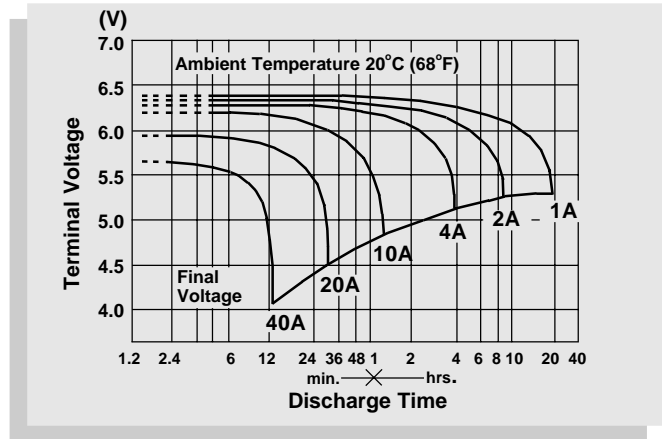


Life Characteristics in Stand-By Use

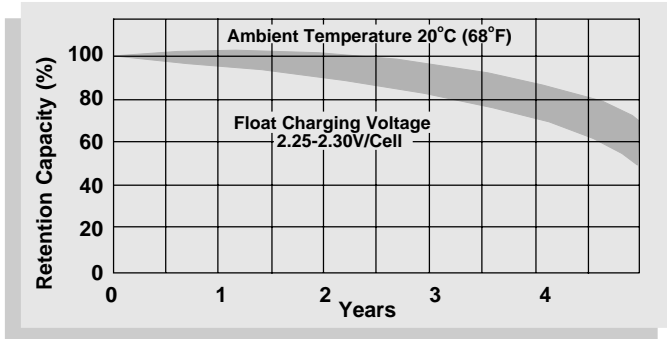


Discharge Time vs. Discharge Current

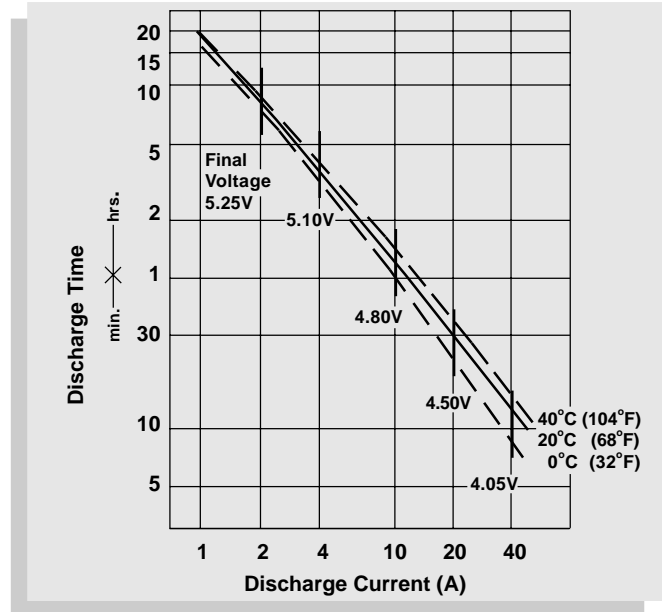

Life Characteristics in Cyclic Use

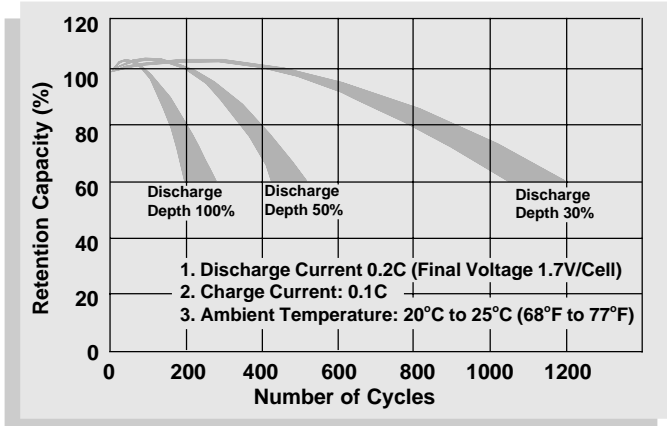

Physical Dimensions: in. (mm)

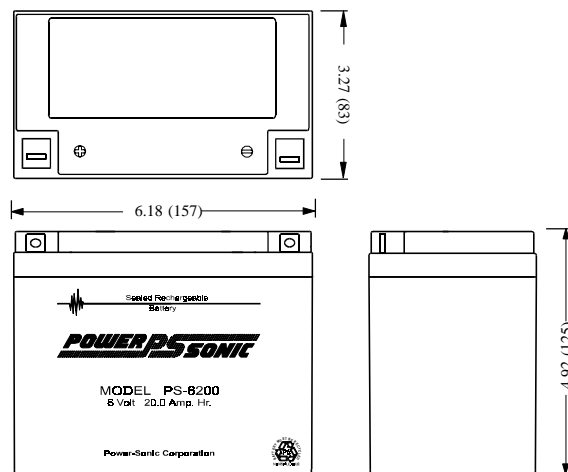

Tolerances are +/- 0.04 in. (+/- 1mm) and +/- 0.08 in. (+/- 2mm) for height dimensions. All data subject to change without notice.

CHARGING

Cycle Applications: Limit initial current to 4.0A. Charge until battery voltage (under charge) reaches 7.20 to 7.35 volts at 68°F (20°C). Hold at 7.20 to 7.35 volts until current drops to approximately 200mA. Battery is fully charged under these conditions, and charger should either be disconnected or switched to "float" voltage.

"Float" or "Stand-By" Service: Hold battery across constant voltage source of 6.75 to 6.90 volts continuously. When held at this voltage, the battery will seek its own current level and maintain itself in a fully charged condition.

NOTE: Due to the self-discharge characteristics of this type of battery, it is imperative that they be charged after 6-9 months of storage, otherwise permanent loss of capacity might occur as a result of sulfation.



SALES & MARKETING
3106 Spring Street
Redwood City, CA 94063 USA
Tel: 650-364-5001 Fax: 650-366-3662
national-sales@power-sonic.com



www.power-sonic.com

ISO9002
FM39170
FM39171

CUSTOMER SERVICE
9163 Siempre Viva Road
San Diego, CA 92154 USA
Tel: 619-661-2030 Fax: 619-661-3648
battery@power-sonic.com